

# LED DECORATIVE EMERGENCY LIGHTS


SEARCH CODE: SC6933



## FEATURES:

- **Bright Reflector:** Mirror-bright reflector and prismatic polycarbonate retractor for optimal light distribution.
- **Architectural Design:** Decorative, low-profile design suitable for commercial and industrial settings.
- **Durable Construction:** Die-cast aluminum housing with powder-coated finishes available in white, black, nickel, and dark bronze.
- **Resilient Housing:** High-impact thermoplastic housing for long-lasting. Sealed and gasketed for additional durability and protection.
- **Code Compliance:** Charge rate/power "ON" LED indicator light with push-to-test switch for compliance testing.

## DIMENSIONS:

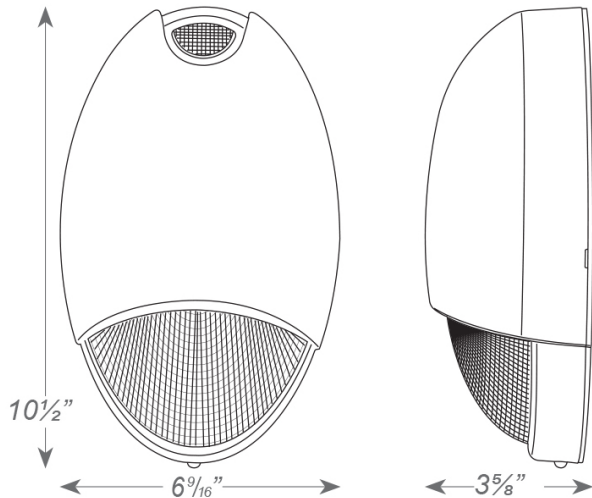

## WARRANTY / LISTINGS:

- Five-year warranty on electronics and housing. Battery pro-rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local, and State Codes.
- UL Listed for wet locations.

## ELECTRICAL:

- **Voltage Compatibility:** Universal 120-277VAC input voltage.
- **Battery System:** 4.8V long-life, maintenance-free, rechargeable NiCd battery.
- **Long Life:** Internal solid-state transfer switch automatically connects the internal battery to the LED board for a minimum of 90-minute emergency illumination.
- **Quick Charging:** Fully automatic solid-state, two-rate charger recharges the battery in 24 hours.
- **Self-Diagnostics:** Self-diagnostic test feature continually diagnoses performance and tests the system for reliable operation and to meet electrical and life safety codes.
- **Wiring Options:** Field-selectable wiring allows "AC" operation to be controlled using a wall switch, photocell, or other switching mechanism.

## MOUNTING:

- Surface mount via easy-connect back plate that fits most standard-size junction boxes.
- Universal K/O pattern on the back plate for wall mounting.
- Threaded opening at the top of the enclosure for conduit mounting.

## SPECIFICATIONS:

Product Code	Color	Battery Back-up	Voltage	Dimensions
DBEL-ACEM-W	White	90 Minutes	120-277VAC	(H) 10½" x (W) 69/16" x (D) 35/8"
DBEL-ACEM-B	Black	90 Minutes	120-277VAC	(H) 10½" x (W) 69/16" x (D) 35/8"
DBEL-ACEM-BR	Bronze	90 Minutes	120-277VAC	(H) 10½" x (W) 69/16" x (D) 35/8"
DBEL-ACEM-N	Nickel	90 Minutes	120-277VAC	(H) 10½" x (W) 69/16" x (D) 35/8"

