

LED FLAT PANEL

SEARCH CODE: SC9605



FEATURES:


- External driver mounted on top. PMMA light guided panel (LGP) does not turn yellow
- Dimmable: 0-10V dimmable
- Easy installation in new construction or retrofit
- Standard mounting options include recessed mounting in grid ceilings, or suspended mounting using attached hanging brackets. For mounting in plaster or other hard ceiling

DIMENSIONS:

2'x2' - (L) 24" x (H) 24"

1'x4' - (L) 48" x (H) 12"

2'x4' - (L) 48" x (H) 24"

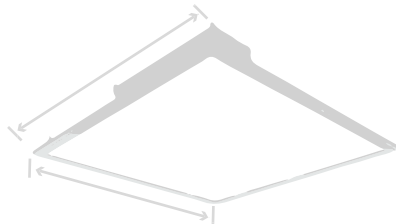

WARRANTY & LISTINGS:

- 5-year warranty
- UL Listed
- DLC
- cULus for damp locations and insulated ceilings (Type IC- rated)

MECHANICAL:

- Power factor: >0.9
- Current (mA): 1050mA 36VDCDL
- Frequency range: 50Hz~60Hz
- Total harmonic distortion: <15%
- Operating temperature: -5° to 104°F

ACCESSORIES:

- Suspension Hanging Kit
- Surface Mount Kit
- Recessed Sheet Rock Kit

SPECIFICATIONS:

Product Code	Wattage	Lumens	Color Temperature	Size
LEDPNL2X2-40W-5K	40W	4200LM	5000K Daylight	2'x2'
LPNG-2X2-4KLM-40K-D	40W	4200LM	4000K Cool White	2'x2'
LPNG-2X2-4KLM-35K-D	40W	4200LM	3500K Neutral White	2'x2'
LPNG-2X2-MCTP	40W	4200LM	Color Selectable 35K, 4K, 5K	2'x2'
LP-2X2-40W-50K-D-HL	40W	4400LM	5000K Daylight	2'x2'
LP-2X2-40W-40K-D-HL	40W	4400LM	4000K Cool White	2'x2'
LPNG-1X4-4KLM-50K-D	40W	4400LM	5000K Daylight	1'x4'
LPNG-1X4-4KLM-40K-D	40W	4400LM	4000K Cool White	1'x4'
LPNG-1X4-4KLM-35K-D	40W	4400LM	3500K Neutral White	1'x4'
LPNG-1X4-MCTP	40W	4400LM	Color Selectable 35K, 4K, 5K	1'x4'
LEDPNL2X4-50W-5K	50W	5500LM	5000K Daylight	2'x4'
LEDPNL2X4-50W-4K	50W	5500LM	4000K Cool White	2'x4'
LEDPNL2X4-50W-35K	50W	5300LM	3500K Neutral White	2'x4'
LEDPNL2X4-35W-3KMV-PRM-ECO	50W	5300LM	3000K Soft White	2'x4'
LPNG-2X4-MCTP	50W	5500LM	Color Selectable 35K, 4K, 5K	2'x4'