


# LED T8 DUAL MODE U-BEND TUBES

**QUICK SEARCH: SC10777**




## FEATURES:

- Ballast compatible and ballast bypass in one lamp
- Bypass mode works in single or double ended wiring
- Protection from arcing
- Over 50% energy savings vs. standard T8 systems
- Color Temperature: Warm White, Neutral White, Cool White, Daylight
- Base: Medium Bi Pin (G13)
- Long life: 50,000 hrs
- Housing: White
- Lens: Frosted

## DIMENSIONS:

- 1.625" (LS) x 22.59" (L) x 1" (D)  
Leg Spacing

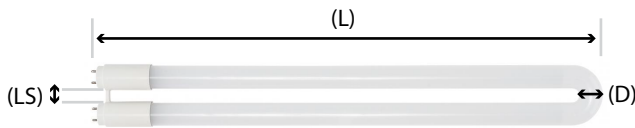

## WARRANTY & LISTINGS:

- 5-year Warranty
- UL Listed / cULus
- Damp Rated
- RoHS Compliant
- DLC certified
- FCC Compliant

## ELECTRICAL:




- Non-Dimmable
- Voltage: 120V-277V
- CRI: 80
- Beam Spread: 160
- Operating Temperature: -25C (-13F) to a maximum of +45C (+113F)
- Operating Frequency: 50/60 Hz
- Power Factor: 0.9

## T8 DIAGRAM:

Ballast Compatible  
(Ballast Option) Double Ended Wiring

Ballast Bypass Double Ended Wiring

Ballast Bypass Single Sided Wiring

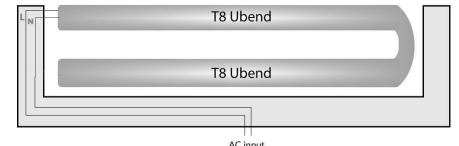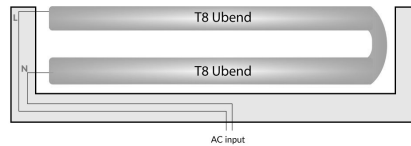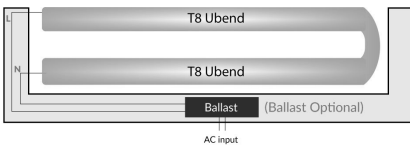

## SPECIFICATION:

Product Code	Wattage	Lumens	Color Temperature	Rewiring
S18453	13W	2000 Lumens	5000K - Daylight	Ballast Bypass/Ballast Compatible
S18452	13W	2000 Lumens	4000K - Cool White	Ballast Bypass/Ballast Compatible
S18451	13W	2000 Lumens	3500K - Neutral White	Ballast Bypass/Ballast Compatible
S18450	13W	2000 Lumens	3000K - Warm White	Ballast Bypass/Ballast Compatible