

LED OUTDOOR FLOOD LIGHT FIXTURES


SEARCH CODE: SC7056



FEATURES:

- Color Selectable: 3500K, 4000K, and 5000K
- Provides a range of 2,000 to 7,000 lumens
- Die cast aluminum housing
- Dark bronze powder coat finish
- Polycarbonate lens

DIMENSIONS:

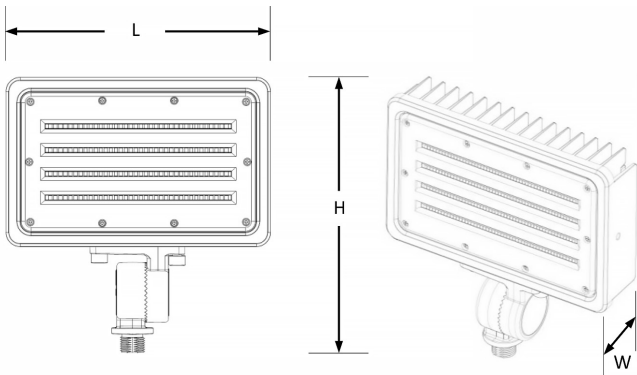

WARRANTY & LISTINGS:

- cULus Listed
- Lifespan 50,000 Hours
- DLC
- IP65 for weather protection
- FCC Compliant
- Rated for 3G Vibration
- 5-Year Warranty

ELECTRICAL:

- Voltage: Universal 120-277 VAC (50/60Hz)
- 0-10vdc dimming drivers are standard
- THD: <20%
- Power Factor >90
- CRI: >80
- Operating Temperature: 0°F to 122°F

ACCESSORIES:

- Yoke Mount option for (31W & 51W)
- Threaded Mounting Plate or ground stake for the knuckle mount
sold seperatly



SPECIFICATIONS:

Product Code	Wattage	Lumens	Dimensions	Mount
LFP16LEDMV-MCT-KN	16W	2,000LM	(L) 4.3" x (W) 1.7" x (H) 5.8"	Knuckle Mount
LFP31LEDMV-MCT-KN	31W	4,000LM	(L) 8.7" x (W) 1.9" x (H) 9"	Knuckle Mount
LFP31LEDMV-MCT-TR-K	31W	4,000LM	(L) 8.7" x (W) 1.9" x (H) 9"	Trunion Mount
LFP51LEDMV-MCT-KN	51W	7,000LM	(L) 8.7" x (W) 1.9" x (H) 9"	Knuckle Mount
LFP51LEDMV-MCT-TR-K	51W	7,000LM	(L) 8.7" x (W) 1.9" x (H) 9"	Trunion Mount

LED OUTDOOR FLOOD LIGHT FIXTURES


SEARCH CODE: SC7056



FEATURES:

- Color Selectable: 3000K, 4000K, and 5000K
- Provides a range of 15,600 to 41,500 lumens
- Die cast aluminum housing
- Dark bronze powder coat finish
- Polycarbonate lens

DIMENSIONS:

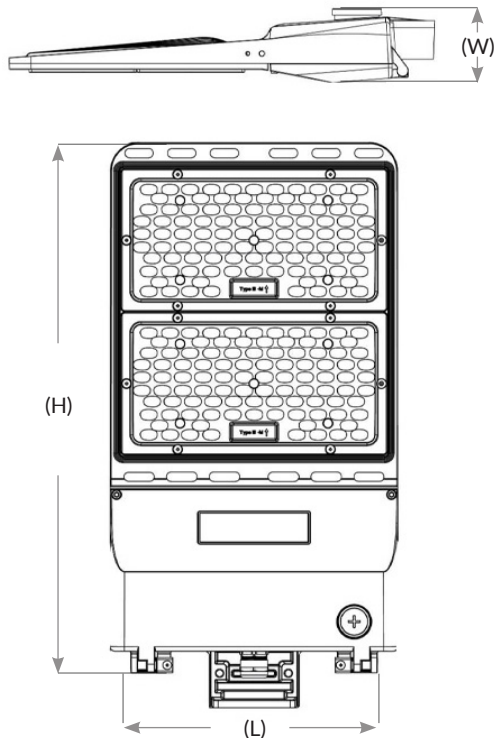


WARRANTY & LISTINGS:

- cULus Listed
- Lifespan 50,000 Hours
- DLC
- IP65 for weather protection
- FCC Compliant
- Rated for 3G Vibration
- 5-Year Warranty

ELECTRICAL:

- Voltage: Universal 120-277 VAC (50/60Hz) AC Voltage with 6-foot incoming power cords
- 0-10vdc dimming drivers are standard
- THD: <20%
- Power Factor >90
- CRI: >80
- Operating Temperature: 0°F to 122°F

MOUNTING:

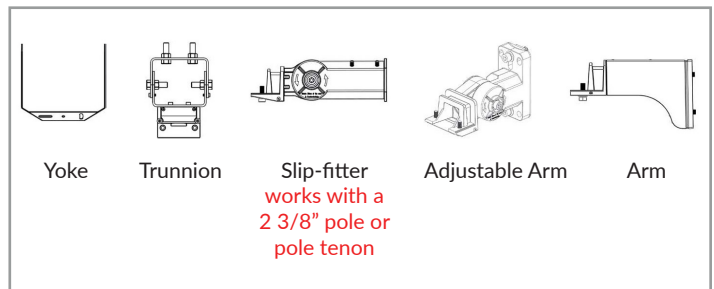

SPECIFICATIONS:

Product Code	Wattage	Lumens	Dimensions	Mount
LFP100-180LEDMV-MCT-SF-K	Tunable 180/145/100	15,600 - 25,000LM	(L) 12" x (W) 4" x (H) 17"	Slip-fitter
LFP100-180LEDMV-MCT-TR-K	Tunable 180/145/100	15,600 - 25,000LM	(L) 12" x (W) 4" x (H) 17"	Trunnion
LFP200-300LEDMV-MCT-SF-K	Tunable 200/250/300	31,800 - 41,500LM	(L) 12" x (W) 4" x (H) 23.5"	Slip-fitter
LFP200-300LEDMV-MCT-TR-K	Tunable 200/250/300	31,800 - 41,500LM	(L) 12" x (W) 4" x (H) 23.5"	Trunnion