

SURFACE MOUNT LED BLINK FIXTURE


QUICK SEARCH: SC10059



FEATURES:

- Rated for damp location indoor use
- Light weight aluminum material
- Dimmable: Can be dimmed down to about 20% using a standard 120V dimmer, range depending the dimmer
- 4 size options: 1'x1' , 1'x2', 1'x4', and 2'x2'
- Finish: White
- Multiple color temperature options: Ranges from 3000K Soft White to 5000K Daylight
- Ultra-low profile made for standard junction box installations
- Unique quick-lock mounting bracket

DIMENSIONS:

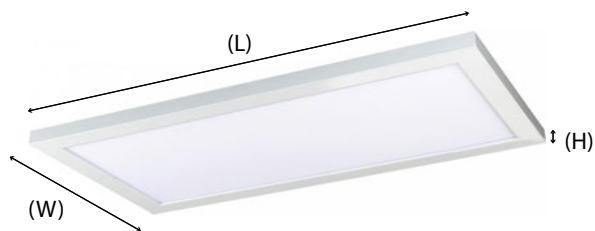

WARRANTY & LISTINGS:

- 5-year warranty
- cETLus - Listed
- Damp
- Energy Star

ELECTRICAL:

- Voltage: 120V/277V
- CRI: 80+
- Operating Temperature: -17C (0F) to a maximum of 45C (113F)

APPLICATION:

- Offices
- Schools
- Large Kitchens
- Hallways
- Low clearance spaces

SPECIFICATION:

Product Code	Wattage	Lumens	Color Temperature	Size	CRI	Dimensions
SL62-1151	18W	1,600 Lumens	5000K Daylight	1'x1'	80	12" (L) x 12" (W) x 0.75" (H)
SL62-1251	18W	1,600 Lumens	4000K Cool White	1'x1'	80	12" (L) x 12" (W) x 0.75" (H)
SL62-1051	18W	1,300 Lumens	3000K Soft White	1'x1'	90	12" (L) x 12" (W) x 0.75" (H)
SL62-1152	22W	1,900 Lumens	5000K Daylight	1'x2'	80	24" (L) x 12" (W) x 0.75" (H)
SL62-1252	22W	1,900 Lumens	4000K Cool White	1'x2'	90	24" (L) x 12" (W) x 0.75" (H)
SL62-1052	22W	1,650 Lumens	3000K Soft White	1'x2'	90	24" (L) x 12" (W) x 0.75" (H)
SL62-1154	45W	4,050 Lumens	5000K Daylight	1'x4'	80	48" (L) x 12" (W) x 0.75" (H)
SL62-1254	45W	3,780 Lumens	4000K Cool White	1'x4'	90	48" (L) x 12" (W) x 0.75" (H)
SL62-1054	45W	3,600 Lumens	3000K Soft White	1'x4'	90	48" (L) x 12" (W) x 0.75" (H)
SL62-1153	45W	4,050 Lumens	5000K Daylight	2'x2'	80	24" (L) x 24" (W) x 0.75" (H)
SL62-1253	45W	4,050 Lumens	4000K Cool White	2'x2'	90	24" (L) x 24" (W) x 0.75" (H)
SL62-1053	45W	3,500 Lumens	3000K Soft White	2'x2'	90	24" (L) x 24" (W) x 0.75" (H)