

LED T8 BALLAST COMPATIBLE NO REWIRING

SEARCH CODE: SC6845




FEATURES:

- Direct replacement of T8 tubes, no electrical modification required
- Compatible with instant start electronic ballasts
- *Must be T8 ballast, will not work with T12 or magnetic ballasts
- Base: Medium Bi-Pin (G13) (T12 / T8)
- 4 Foot T8
- CCT (Kelvin): 3000K/4000K/5000K
- Kelvin: CCT option on select models
- Long life - 50,000 hours
- Over 40% energy savings vs standard 4' T8 systems

DIMENSIONS:

- (L) 48" x (W) 1"

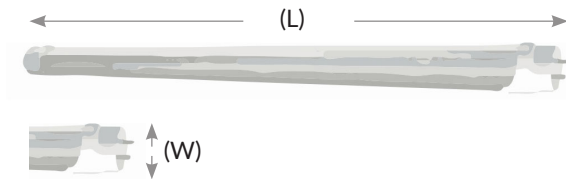

WARRANTY & LISTINGS:


- 5-year warranty
- UL Listed
- DLC
- RoHs Compliant

ELECTRICAL:

- Voltage 120V-277V
- Lamp type: Linear
- Operating Frequency: 50/60 Hz
- CRI: 82
- Beam Angle: 220°
- Operating Temperature: -20C (-4F) to a maximum of +45C (+113F)
- Fluorescent Equivalent: 25W-32W

INSTALLATION:

- The LED T8 lamp is the perfect plug and play retrofit solution to quickly save energy and maintenance costs. It can be installed with an electronic T8 ballast with no rewiring required.

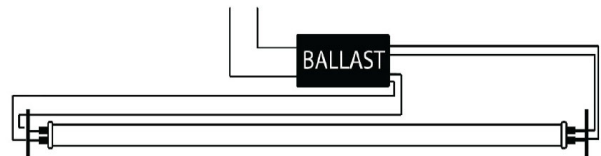

SPECIFICATIONS:

Product Code	Wattage	Lumens	Color Temperature	Size	Lens	Install Type
S11928	10W	1800LM	CCT 40K/50K/65K	4 Foot	Frosted	No Rewiring - T8 Ballast Compatible
BT814W4FT-5000K	11W	1800LM	5000K Daylight	4 Foot	Frosted	No Rewiring - T8 Ballast Compatible
S49977	14W	2200LM	4000K Cool White	4 Foot	Frosted	No Rewiring - T8 Ballast Compatible

LED T8 BALLAST REWIRING

SEARCH CODE: SC6845




FEATURES:

- A ballast bypass allows T8 bulbs to directly connect to line voltage (120V) without the need for a ballast
- Outdated and potentially faulty ballasts can be avoided
- Compatible with 120V-277V
- 50/60 Hz
- Base: Medium Bi-Pin (G13) (T12 / T8)
- Single and Double sided option available, check diagrams below
- Kelvin: CCT on select models



INSTALLATION:

- Single Sided Bypass



INSTALLATION:

- Double Sided Bypass



SPECIFICATIONS:

Product Code	Wattage	Lumens	Color Temperature	Size	Lens	Install Type
LEDT8-15W-5000K-F-BYP	15W	2000LM	5000K Daylight	4 Foot	Frosted	Ballast Bypass - Single Sided Wiring
34880	15W	2100LM	4000K Cool White	4 Foot	Frosted	Ballast Bypass - Single Sided Wiring
T8-EZ5-GS-4FT-15W-40K-C	18W	1900LM	4000K Cool White	4 Foot	Clear	Ballast Bypass - Single Sided Wiring
T8-EZ6-GS-4FT-18W-50K-C	18W	1900LM	5000K Daylight	4 Foot	Clear	Ballast Bypass - Single Sided Wiring
S39914	18W	1900LM	3500K Neutral White	4 Foot	Frosted	Ballast Bypass - Single Sided Wiring
S9720	15W	1800LM	3000K Soft White	4 Foot	Frosted	Ballast Bypass - Single Sided Wiring
S11766	14W	1800LM	30K/35K/40K/50K/65K	4 Foot	Frosted	Ballast Bypass - Double Sided Wiring
S39916	14W	1800LM	5000K Daylight	4 Foot	Frosted	Ballast Bypass - Double Sided Wiring
S39915	14W	1800LM	4000K Cool White	4 Foot	Frosted	Ballast Bypass - Double Sided Wiring
S9914	14W	1700LM	3500K Neutral White	4 Foot	Frosted	Ballast Bypass - Double Sided Wiring
S39913	15W	1700LM	3000K Soft White	4 Foot	Frosted	Ballast Bypass - Double Sided Wiring