

LED U-BEND TUBE LIGHTS

QUICK SEARCH: SC6844




FEATURES:

- Universal installation- ballast bypass(single or double sided wiring) or plug and play
- Up to 60 percent energy savings versus standard T8 systems
- Color Temperature: Soft White, Neutral White, Cool White, Daylight
- Base: Medium Bi Pin (G13)
- Long life: 50,000 hrs
- Finish: Frost
- Ballast compatible and ballast bypass in one lamp
- Shatterproof plastic

DIMENSIONS:

- 6" (LS) x 22.5 (L) x 1" (D)
Leg Spacing

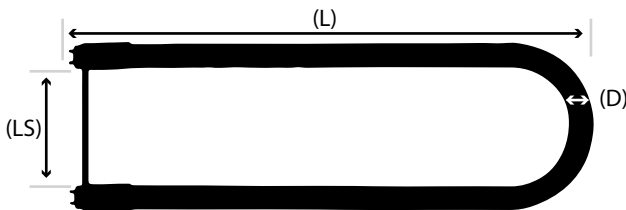

WARRANTY & LISTINGS:


- 5-year Warranty
- UL Listed / cULus
- Damp Rated
- RoHS Compliant
- DLC certified
- NSF Approved
- Dimmable

ELECTRICAL:


- 32 watt Fluorescent equivalency
- Voltage: 120V-277V
- CRI: 83
- Beam Spread: 160
- Operating Temperature: -20C (-4F) to a maximum of +45C (+113F)
- Operating Frequency: 50/60 Hz
- Solid State LED lighting

T8 DIAGRAM:

Single Sided Bypass

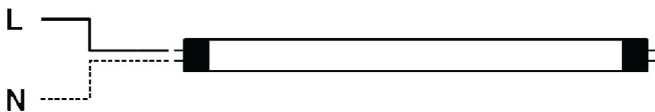

Double Sided Bypass

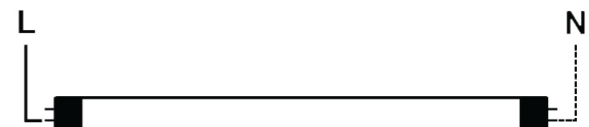

SPECIFICATION:

Product Code	Wattage	Lumens	Color Temperature	Rewiring
S11973	13W	2000 Lumens	5000K - Daylight	Universal - Ballast Compatible & Bypass
S11972	13W	2000 Lumens	4000K - Cool White	Universal - Ballast Compatible & Bypass
S11971	13W	2000 Lumens	3500K - Neutral White	Universal - Ballast Compatible & Bypass
S11970	13W	2000 Lumens	3000K - Soft White	Universal - Ballast Compatible & Bypass