

Parabolic Suspended Light Fixtures

Search Code: SC9428



FEATURES

- **High Efficiency:** Up to 115 lm/W (On Select Models).
- **Durable Construction:** Modern design. Powder coat white finish with aluminum housing. Solid-state, high shock, and vibration resistant.
- **Optional prismatic lens** replaces the parabolic lens, field installed.
- **Versatile Applications:** Suitable for commercial settings such as offices, conference rooms, reception areas, and education facilities.
- **Dimmable Options:** 0-10V standard dimming compatibility with using low voltage dimmers.
- **Multiple Accessories:** Coupling bracket, adjustable suspension kit, and 6 foot cord.
- **No Ultra Violet or IR radiation.**
- **No risky mercury or lead entering the atmosphere.**
- **Customizable Settings:** Available in multiple wattages. Multi CCT (Selectable switch is inside the fixture). Choose from 3500K/ 4000K/ 5000K.
- **Super bright optimal light distribution.**
- **Long Lifespan:** Rated for up to 50,000 operational hours.

ELECTRICAL

- **Input Voltage:** 120-277VAC.
- **CRI:** >80.
- **Power Factor:** >0.95.
- **Total Harmonic Distortion (THD):** < 20%.
- **Operating Temperature Range:** (-17°C to 40°C) 0°F to 104°F.
- **Frequency Range:** 50Hz~60Hz.
- **Dimming:** 0-10V standard - requires low voltage dimmer.

MOUNTING

- **Standard Suspension Hanging Kit.**




WARRANTY & LISTINGS

- **Warranty:** 5 years (50,000 operational hours).
- **Certifications:** UL Listed.

ACCESSORIES

- **Coupling bracket.**
- **6ft suspension kit with Y-connector key hole set + 2 T-bar clips + 1 cable bushing + 3 plastic tie straps.**
- **6FT. cord, SJTW 18 AWG 5-conductor included.**

DIMENSIONS

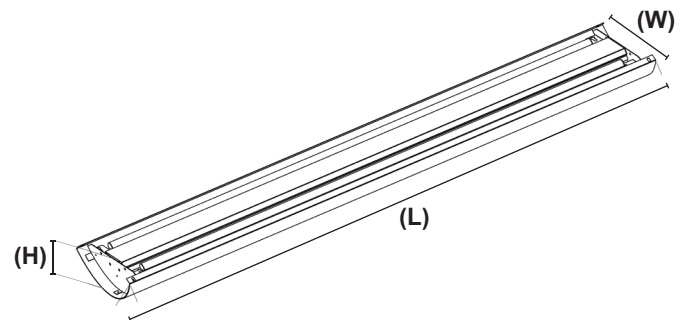

Model	Dimensions
SLSCLT-4FT-40W-MCT-D-K	47.3"(L) x 2.5"(H) x 9.3" (W)
SLSCLP-4FT-40W-MCT-D-K	47.3"(L) x 2.5"(H) x 9.3" (W)
SLSCLP-UD-4FT-60W-MCT-D-K	49.2" (L) x 2.8" (H) x 11" (W)

ORDERING INFORMATION

Product Code	Size	Wattage	Lumens	Color Temperature	Lens
SLSCLT-4FT-40W-MCT-D-K	4 Foot	40W Down	4600L	Color Selectable 35/40/50K	Translucent Lens
SLSCLP-4FT-40W-MCT-D-K	4 Foot	40W Down	4600L	Color Selectable 35/40/50K	Parabolic Cells
SLSCLP-UD-4FT-60W-MCT-D-K	4 Foot	60W Up/Down	6500L	Color Selectable 35/40/50K	Parabolic Cells