


# LED DROP CEILING T-BAR LIGHTS

SEARCH CODE: SC12865

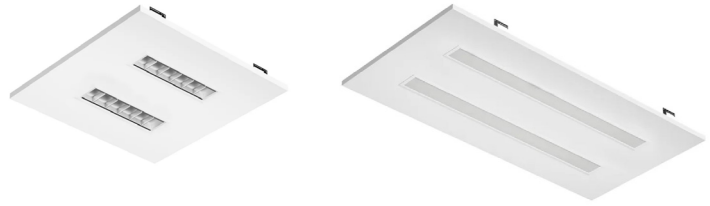

## FEATURES:

- Multiple color temperatures: Ranging from 3000K, 3500K, and 4000K (Selectable Switch Inside Fixture)
- Low Profile Modern Design
- Aluminum Housing With Matte White Finish
- Lens Snaps into Housing
- Dimmable: 0~10V Dimming
- Two Lens Options: Frosted and Louvered

## APPLICATION:

- Offices
- Hotels
- Libraries
- Meeting Rooms
- Conference Halls

## WARRANTY & LISTINGS:

- 5-year warranty
- UL Listed
- IP54 Damp Rated
- 50,000 Hours Rated Life

## ELECTRICAL:

- Voltage: 120-277VAC 50/60Hz
- Power factor: >0.95
- Operating Temperature: 0°F~104°F
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 100°

## ACCESSORIES:

- Emergency Battery Backup
- Motion Sensor

## SPECIFICATIONS:


Product Code	Wattage	Lumens	Lens	Accessories	Size
DIPX-2X2-MCT	20W	2200LM	Frosted	As Is	2'x2'
DIPX-2X2-MCT-MS	20W	2200LM	Frosted	Motion Sensor	2'x2'
DIPX-2X2-MCT-EM	20W	2200LM	Frosted	EM Back-Up	2'x2'
DIPX-2X2-MCT-LV	20W	2200LM	Louvered	As Is	2'x2'
DIPX-2X2-MCT-LV-MS	20W	2200LM	Louvered	Motion Sensor	2'x2'
DIPX-2X2-MCT-LV-EM	20W	2200LM	Louvered	EM Back-Up	2'x2'
DIPX-2X4-MCT	60W	6600LM	Frosted	As Is	2'x4'
DIPX-2X4-MCT-MS	60W	6600LM	Frosted	Motion Sensor	2'x4'
DIPX-2X4-MCT-EM	60W	6600LM	Frosted	EM Back-Up	2'x4'
DIPX-2X4-MCT-LV	60W	6600LM	Louvered	As Is	2'x4'
DIPX-2X4-MCT-LV-MS	60W	6600LM	Louvered	Motion Sensor	2'x4'
DIPX-2X4-MCT-LV-EM	60W	6600LM	Louvered	EM Back-Up	2'x4'

# LED DROP CEILING T-BAR LIGHTS


SEARCH CODE: SC12865




## 20W DIMENSIONS:

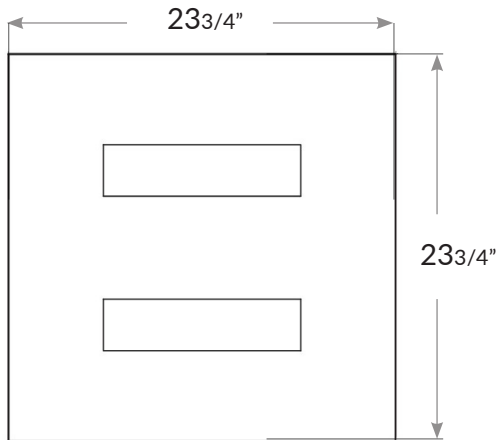


## 20W PHOTOMETRICS:

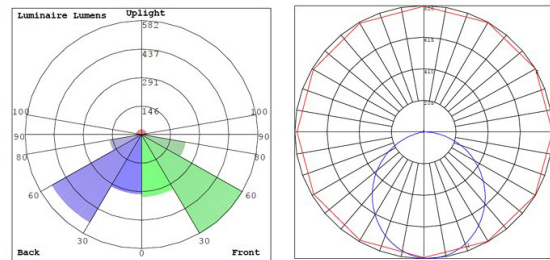


BUD Rating: B1-U2-G1

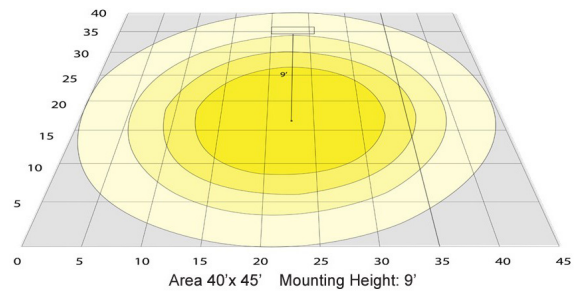

## 60W DIMENSIONS:

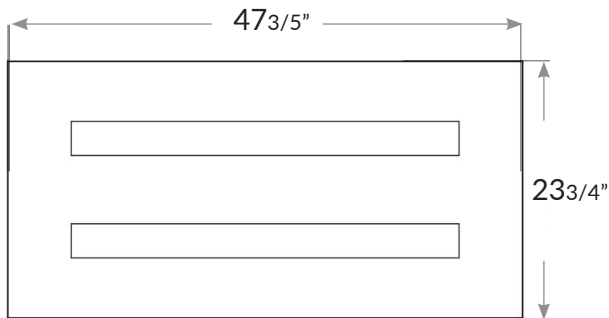

## 60W PHOTOMETRICS:

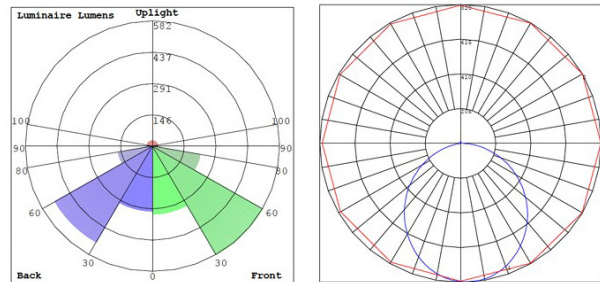

BUD Rating: B1-U2-G1

