

WET LOCATION LED EXIT SIGN


QUICK SEARCH: SC5685



FEATURES:

- Ultra bright, energy efficient, long life Red or Green LEDs
- 5VA flame retardant, UV-stabilized polycarbonate in white, black or gray
- High-impact resistant, UV-stabilized polycarbonate clear lens
- Corrosion-resistant enclosure with engineering grade silicone gasket
- Top and side K/O's provided for conduit feed applications
- EZ snap-out chevron directional indicators

DIMENSIONS:

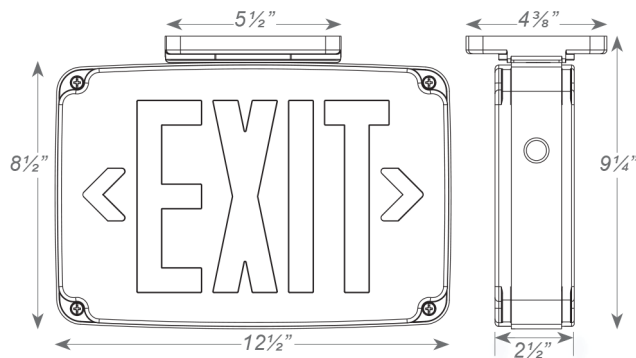

WARRANTY & LISTINGS:

- 5-year warranty
- UL listed for damp locations (20°C - 40°C)(68°-104°F)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

ELECTRICAL:

- Dual 120/277 voltage
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery)
- 4.8V long life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

MOUNTING:

- Polycarbonate mounting canopy included for top or end mount
- Universal K/O pattern on back plate for wall mount

SPECIFICATION:

Product Code	Letter Color	Housing Color
WLEZXTEU-3-R-W-EM	Red	White
WLEZXTEU-3-R-G-EM	Red	Gray
WLEZXTEU-3-R-B-EM	Red	Black
WLEZXTEU-3-G-W-EM	Green	White
WLEZXTEU-3-G-G-EM	Green	Gray
WLEZXTEU-3-G-B-EM	Green	Black